

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
31.07.2002 Bulletin 2002/31

(51) Int Cl.7: H04L 12/56, H04L 29/06

(21) Application number: 02000449.5

(22) Date of filing: 08.01.2002

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

- Agarwal, Rajeev
Northbrook, Illinois 60062 (US)
- La, Richard J.
Buffalo Grove, Illinois 60089 (US)

(30) Priority: 12.01.2001 US 759846

(71) Applicant: MOTOROLA, INC.
Schaumburg, IL 60196 (US)

(74) Representative: Potts, Susan Patricia et al
Motorola European Intellectual Property
Operations
Midpoint
Alencon Link
Basingstoke, Hampshire RG21 7PL (GB)

(72) Inventors:
• Subramanian, Vijay G.
Chicago, Illinois 60057 (US)

(54) Method for packet scheduling and radio resource allocation in a wireless communication system

(57) A method of performing packet level transmission scheduling in a communications system including a plurality of cells, each cell including a base station (104) and a plurality of mobile stations (108, 110, 112). The method performs scheduling while considering radio resource allocation at the wireless access node. In a schedule plan phase of the method, average power and average effective data rate are determined for all

mobile stations in the system. In addition, the planned fraction of frames p that each mobile in the system will transmit is determined so that resources are allocated fairly. In the actual schedule phase of the method, current power and effective data rate values are compared to the average power values. This information along with the p values is used to determine the actual schedule of packet transmissions for all mobiles in a particular cell.

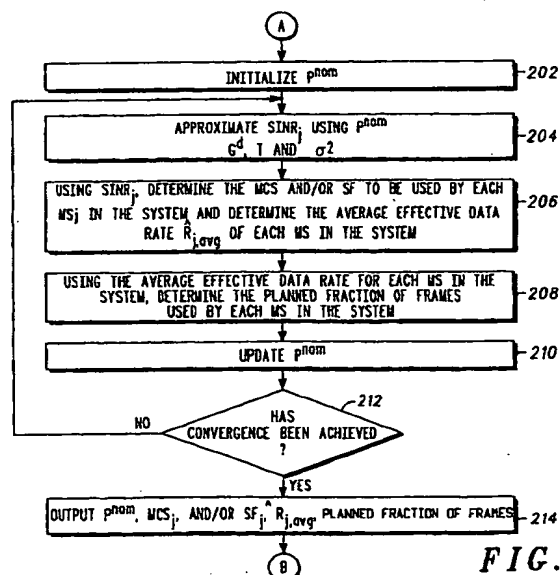


FIG. 2

Description

Field of the Invention

- 5 **[0001]** The present invention relates generally to communication systems and in particular to packet scheduling and radio-resource allocation in a wireless communication system.

Background of the Invention

- 10 **[0002]** Efficient radio resource allocation is important in the design of wireless communication systems. As the number of multimedia sources being channeled through wireless systems increases, the demands placed on the wireless access node becomes increasingly challenging. Currently, four traffic classes are defined for packetized service: conversational (e.g. voice telephony), streaming (e.g. radio broadcast over the internet), interactive (e.g. web browsing) and background (e.g. email). Wireless systems are required to uphold stringent quality of service (QoS) requirements (e.g. throughput, delay, signal loss) despite the fact that wireless channels are time varying and resource limited compared to wireline channels. In wireless systems, packet-level scheduling and radio resource allocation can present problems in meeting QoS requirements for all users (mobiles) in the system. Traditional wire-line schedulers such as first-come first serve (FCFS), priority queuing or weighted-fair-queuing (WFQ), are not aware of the radio conditions (e.g. channel gain values) and thus make scheduling decisions without taking radio conditions into account. For example, if mobile A is transmitting on a strong channel and mobile B is transmitting on a weaker channel, traditional wire-line schedulers would not take this information into account. If instead, transmissions are prioritized based on channel conditions, it is possible to improve system throughput. Thus, utilizing a scheduler with knowledge of the radio conditions produces a more efficient system.

- 20 **[0003]** Efficiency is not the only concern in a commercial system. The system must also be designed to ensure that resources are fairly arbitrated among the various mobiles so that each user can meet its QoS requirements. Some schedulers, that are cognizant of the channel conditions and that attempt to maximize efficiency while maintaining some degree of fairness in the arbitration of resources, have been proposed. However, none of the proposals provides a means to change the relative emphasis between system efficiency and fairness of allocation as the need arises.

- 25 **[0004]** Thus, there is a need for a systematic and flexible means to strike different trade-offs between system efficiency and fairness of allocation.

Brief Description of the Drawings

[0005]

- 35 FIG. 1 is a block diagram of a communication system that can implement the preferred embodiment of the present invention.
FIG. 2 is a flow chart of the tasks performed in the preferred embodiment of the schedule plan phase of the method of the present invention.
40 FIG. 3 is a plot of curves used by a link adaptation algorithm that can be used in the preferred embodiment of the scheduling algorithm of the present invention.
FIG. 4 is a flow chart of the tasks performed in a first embodiment of the actual schedule phase of the method of the present invention.
45 FIG. 5 is a flow chart of the tasks performed in an alternate embodiment of the actual schedule phase of the method of the present invention.

Summary of the Preferred Embodiment

- 50 **[0006]** The present invention provides in a communications system comprising a plurality of cells, each cell having a base station and a plurality of mobile stations, a method of scheduling packet transmission comprising the steps of:
a) determining a nominal power level for all base stations in the system; b) determining an average effective data rate for all mobile stations in the system; c) using the transmit power level and average effective data rate to determine a tentative transmission schedule for each of the plurality of mobile stations in the system; and d) modifying the tentative transmission schedule using current radio conditions in a particular cell to determine an actual transmission schedule
55 for each mobile station in the particular cell.

Description of the Preferred Embodiment

[0007] The preferred embodiment of the present invention performs packet level transmission scheduling while considering radio resource allocation at the wireless access node. The invention offers gains over a scheduling scheme that is performed independent of radio resource allocation. Herein, the term scheduling includes determining power level allocations, data rate allocations and time allocation of resources. The scheduler of the present invention performs tasks on the packet level assuming that the admission control decisions at the call level have already been performed. The manner in which the data rate allocations are determined depends on the type of system that is employed. In a TDMA system, the data rate allocation is determined by adapting the modulation and coding scheme (MCS) and/or by accessing multiple time slots or carriers. In a CDMA system, on the other hand, the data rate allocation can be determined in several ways. For example, the allocation can be determined by adapting processing gains or spreading factors (SFs), adapting the MCS, adapting multiple spreading code allocations or a combination of the three. The present invention uses the radio condition information at two different time scales of resolution. At a slow time scale, in the schedule plan phase, allocations are made on the basis of average radio conditions of all mobiles in the system. At a faster time scale, in the actual schedule phase, allocations are made on a per cell basis based on the current radio condition of each mobile in the cell. The frequency at which current radio conditions are updated depends on the rate at which feedback reports are generated in the system. When a report is desired for the downlink channel conditions, the scheduler, if located at the base station, sends a polling message to the mobile stations in the system. The uplink channel conditions can be measured at the base station. If the scheduler is located at the radio network controller (RNC), the scheduler sends a polling message to the mobile stations for the downlink channel conditions and sends a polling message to the base station for the uplink channel conditions. The scheduler algorithm includes a parameter that represents the frequency at which reports are desired.

[0008] Referring to FIG. 1, a diagram of a communication system in accordance with the preferred embodiment of the present invention is shown. In the preferred embodiment, the communication system 100 includes an RNC 102 coupled to a first communication cell "a" including a first base station (BTS) 104_a. The BTS 104_a is coupled to the RNC 102 over a wireline connection 106_a. Coupled to the first BTS 104_a are a plurality of mobile stations (MS) 108_a, 110_a, 112_a. For simplicity of explanation, three MSs are shown. It should be recognized that the invention can be implemented using more than three MSs coupled to the BTS_a. The MSs 108_a, 110_a, 112_a are coupled to the BTS 104_a through wireless connections 114_a, 116_a, 118_a. The RNC 102 is also coupled to a second communication cell "b" including a second base station (BTS) 104_b. The BTS 104_b is coupled to the RNC 102 over a wireline connection 106_b. Coupled to the second BTS 104_b are a plurality of MSs 108_b, 110_b, 112_b. For simplicity of explanation, three MSs are shown. It should be recognized that the invention can be implemented using more than three MSs coupled to the BTS_b. In alternate embodiments, the RNC 102 can be coupled to a plurality of communication cells "N" as previously described. For simplicity of explanation, the invention will be described with respect to the RNC 102 coupled to a first communication cell "a" and a second communication cell "b." A BTS and MS that can be used with the present invention are available from Motorola, Inc. of Arlington Heights, Illinois. An RNC that can be used with the present invention can be purchased from several sources, such as, Alcatel of France and Nortel of Dallas, Texas.

[0009] In the wireless communication system 100, traffic is transmitted between a BTS and a MS in the form of frames/packets. Because the resources in the system must be shared by many sources, the frames/packets to be transmitted by a MS are stored in a queue until the packet/frame is scheduled for transmission. A separate queue for each communication with the MSs 108_a, 110_a, 112_a receivers is maintained either at the BTS 104_a or at the RNC 102. Similarly, a separate queue for each communication with the MSs 108_b, 110_b, 112_b receivers is maintained at the BTS_b or at the RNC 102. Similar queues exist at each of the MSs for each communication which they are the initiating agents. In the improved scheduling scheme of the present invention, the first step in determining the appropriate allocations is to determine a nominal channel power level and average effective data rate (e.g., using MCS and spreading gain) for the MSs 108_{a,b}, 110_{a,b}, 112_{a,b} in the system. The first step also includes determining the fraction of time, p , each MS 108_{a,b}, 110_{a,b}, 112_{a,b} will transmit during a window, W . This step in the scheduling scheme is termed the schedule plan.

[0010] In a preferred embodiment, the window W is approximately 100 frames in length. The time-varying nature of the wireless channels are due in part to fluctuations in the channel gains. The channel gains consist of distance based path loss, shadow fading and multipath fading. The choice of the decision time window separates the mobiles 108_{a,b}, 110_{a,b}, 112_{a,b} into roughly three classes: (1) the fast class in which only the distance based path loss is fixed; (2) the medium class in which both the distance based path loss and shadow fading terms are fixed; and (3) the slow (static) class in which all three terms are fixed.

[0011] During the schedule plan phase average radio conditions (averaged over the decision time window W for each mobile 108_{a,b}, 110_{a,b}, 112_{a,b}) are used to calculate a transmission allocation amongst the currently active mobiles 108_{a,b}, 110_{a,b}, 112_{a,b} to maximize net utility among a fixed set of base stations. The transmission allocations are then fine tuned during a subsequent time window in the actual schedule plan phase described later herein.

[0012] In the preferred embodiment, the schedule plan is implemented in the RNC 102. In alternate embodiments,

the schedule plan can be implemented at the BTS 104_{a,b}. The transmission allocations determined in the schedule plan are weights for a weighted-fair-queueing-type sharing of time, i.e., the percentage of time that transmission resources are occupied by a particular mobile 108_{a,b}, 110_{a,b}, 112_{a,b}. The percentage of time is denoted by the quantity ρ (see the Table below). This quantity assists in setting some fairness guarantees in that it ensures that each backlogged mobile uses the transmission resources for a certain amount of time over the decision time window. In a weighted-fair-queueing approach, resources are fairly arbitrated among the various mobiles so that each mobile can meet its QoS requirements. The schedule plan phase determines nominal power levels and ρ values such that the sum total utility of all mobiles 108_{a,b}, 110_{a,b}, 112_{a,b} is maximized. The mathematical formulation described herein is for downlink transmissions. However, it should be recognized that the invention can also be used for uplink transmissions. The nominal power levels can be interpreted as being the maximum power level allowed or the average power level allowed at each base station in the downlink and at each mobile on the uplink.

[0013] The parameters used in the mathematical calculations for the schedule plan are set forth in the Table below.

Parameter	Description
b	Points to specific base stations
W	Schedule plan window in frames
M _b	Number of frames assigned to traffic sources at base station b
U _j (.)	Utility function for user j
G ^d	Channel gain matrix with elements G _{bj} which are channel gains from BTS b to MS j for the downlink
G ^u	Channel gain matrix with elements G _{jb} which are channel gains from MS j to BTS b for the uplink
T	Gain matrix with elements T _{ab} which are gains between base station a and b
σ^2	Unaccounted for interference plus receiver noise variance
\hat{R}_j	Effective data rate for user j given by the data rate or link adaptation algorithm and the frame error rate calculation
$\hat{R}_{j,avg}$	Average effective data rate for user j
P _b ^{nom}	Nominal transmit power level for base station b
C _j	number of channel and class based credits for each connection
\bar{W}_j	amount of normalized bytes transmitted for each connection during the scheduling window
w _j	weight for the connection class (determined by QoS class)
Parameter (continued)	Description (continued)
β	tunable control parameter used to determine the actual allocation of the available bandwidth capacity
γ	tunable control parameter used to determine the actual allocation of the available bandwidth capacity
ρ_j	Fraction of time the transmission resources are occupied by user j

[0014] Referring to FIG. 2, a flowchart of the tasks performed in the schedule plan phase of the present invention are shown. In block 202, the power transmitted by each BTS in the system is given an initial value. An initial value used for the power transmitted by each BTS could be the maximum allowed by the system. In block 204, the initial power values along with the channel gain G_{bj}, interference channel gain T_{ab}, and receiver noise power plus unaccounted interference σ^2 are used to approximate the signal to interference plus noise ratio (SINR) for each mobile station j. The quantities G_{bj}, T_{ab}, and σ^2 are obtained by polling the transceivers at each MS and each BTS for a measurement report. In computing the SINR for each mobile station j, let P^{nom} denote the vector of nominal powers at all of the base stations in the system. For example, P_b^{nom} denotes the nominal power used at the base station b. Let G_{bj} denote the energy gain from base station b to mobile station j. Let T_{ab} denote the energy gain from base station a to base station b. Then the SINR at mobile station j can be approximated by

$$SINR_j = \frac{P_b^{nom} G_{bj}}{\sum_{a \neq b} P_a^{nom} T_{ab} + \sigma^2} \quad (1)$$

In an alternate embodiment, more accurate formulae for SINR from known literature may be used. For instance, in the downlink T_{ab} may be replaced by G_{aj} , the energy gain from base station a to mobile station j . In yet another alternate embodiment, the SINR may be obtained directly from measurement reports. The direct measurement approach is most useful when the nominal transmit power level is not varied.

[0015] In block 206, the $SINR_j$ is used to determine the modulation and coding scheme and/or spreading factor (SF) to be used by each MS 108_{a,b}, 110_{a,b}, 112_{a,b} in the system. The $SINR_j$ is then used to determine the average effective data rate $\hat{R}_{j,avg}$ of each MS 108_{a,b}, 110_{a,b}, 112_{a,b} in the system as follows. For each MCS and SF pair, there is a corresponding fixed data rate R_j . The $SINR_j$ is used to calculate the frame error rate (FER)_j for each MS 108_{a,b}, 110_{a,b}, 112_{a,b} wherein the FER_j is a function of the $SINR_j$, the MCS_j and the SF. The effective data rate can be expressed as:

$$\hat{R}_j = R_j(1 - FER_j) =: \Gamma_j(SINR_j). \quad (2)$$

[0016] Referring to FIG. 3, curves used for one link adaptation algorithm in determining the quantities in block 206 (FIG. 2) are shown. In the preferred embodiment, curves for a TDMA EDGE system are utilized. The upper portion of FIG. 3 shows FER vs. SINR curves for modulation and coding schemes MCS 1, MCS 2 and MCS 9. The lower portion of FIG. 3 plots the effective data rate (throughput), $(1 - FER) * R$, for each of the MCSs shown in the upper portion of the figure. As previously mentioned, the data rate R is a known quantity for each MCS. In the link adaptation algorithm, for each value of SINR calculated in block 204 (FIG. 2), the algorithm identifies potential MCSs whose FER (at that SINR value) is at most the target FER in the upper portion of FIG. 3. Then, among the potential MCSs identified, in the bottom half of FIG. 3, the algorithm chooses the MCS with the highest effective data rate. The corresponding effective data rate is recorded in the bold curve and gives the SINR \rightarrow Effective data rate mapping $\hat{R}_j = R_j(1 - FER_j) =: \Gamma_j(SINR_j)$ of equation (2) above.

[0017] An example for a TDMA system has been described. A similar scheme can be used for a CDMA system. In the case of a CDMA system there would be similar performance curves except indexed by the spreading factor and the MCS. The definition of the effective rate remains the same.

[0018] The average effective data rate $\hat{R}_{j,avg}$ is used in block 208 to produce the planned fraction of frames ρ_j to be used by each MS 108_{a,b}, 110_{a,b}, 112_{a,b}, and the corresponding throughput equals $\rho_j \hat{R}_{j,avg}$. The values are obtained as a solution to the optimisation problem:

$$\begin{array}{ll} \max_{\rho_j} & \sum_{j \in J_b} U_j(\rho_j \hat{R}_{j,avg}) \\ \text{subject to} & \\ & \sum_{j \in J_b} \rho_j = M_b \\ & \rho_j \geq 0 \end{array}$$

In the preferred embodiment the utility function is

$$U_j(x) = \begin{cases} x^\alpha, & \alpha < 1, \alpha \neq 0 \\ \log(x), & \alpha = 0 \end{cases} \quad (3)$$

For this utility function, the planned fraction of frames, ρ_j , is given by the equation

$$\rho_j = \frac{(\hat{R}_{j,avg})^{\frac{\alpha}{1-\alpha}}}{\sum_{j \in J_b} (\hat{R}_{j,avg})^{\frac{\alpha}{1-\alpha}}} M_b \propto (\hat{R}_{j,avg})^{\frac{\alpha}{1-\alpha}}. \quad (4)$$

Note that if α is greater than zero, the allocation favors users with higher rates, i.e., the user with a higher rate gets a higher fraction of frames allocated to it. The parameter α controls the extent to which this bias is enforced. A value of α equal to 1 leads to an efficiency only solution with all slots allocated to the users with the highest data rates. A value of α close to ∞ yields a fairness only solution. A value of α equal to 0 is equivalent to using a logarithmic utility function and yields a proportionally fair solution. The throughput for this example is then given by:

$$\text{throughput}_j = \rho_j \hat{R}_{j,avg} \propto \hat{R}_{j,avg}^{\frac{1}{1-\alpha}} = \hat{R}_{j,avg}^{\beta} \text{ where } \beta = \frac{1}{1-\alpha}. \quad (5)$$

[0019] The ρ_j values along with the effective data rate are used to determine the frame credits available to each MS 108_{a,b}, 110_{a,b}, 112_{a,b}. The frame credit value is the number of bits to be transmitted over a window W . The frame credit value is used in the actual schedule phase to ensure that no MS 108_{a,b}, 110_{a,b}, 112_{a,b} is allocated an inordinate share of the resources. Once the ρ_j values and average effective data rate $\hat{R}_{j,avg}$ values are known, p^{nom} is updated (block 210) and the algorithm loops through blocks 204, 206 and 208 until convergence is achieved (decision block 212). Once convergence is achieved, the algorithm outputs p^{nom} , the MCS_j and/or SF_j, $\hat{R}_{j,avg}$, and ρ_j . The algorithm in the schedule plan can also be used to calculate the nominal power levels only. In such a case, the schedule plan algorithm is referred to as the nominal power allocation algorithm.

[0020] In the actual schedule phase of the preferred embodiment of the scheduling algorithm of the present invention, the allocation quantities are suitably modified on the basis of current radio conditions. The current radio conditions are preferably available from the periodic feedback reports. The current radio conditions can also be available through some other mechanism such as pilot measurements in a CDMA-based system. Specifically, in the actual schedule phase, the nominal values of power levels p^{nom} , average effective data rate $\hat{R}_{j,avg}$, along with the planned fraction of frames ρ_j and current measurement reports are used to determine the actual schedule for mobile station transmissions in a particular cell a or b . Note here, that whereas in the schedule plan average values (power, effective data rate, etc.) are determined for all MSs in the system, in the actual schedule, current values (power, effective data rate, etc.) are used to determine the transmission schedule on a per cell basis. Specifically, current values are compared to average values in determining the order in which MSs 108_a, 110_a, 112_a or 108_b, 110_b, 112_b will transmit. The goal of the actual schedule is to give an advantage to the MSs among 108, 110, 112 with good channel conditions to maximize efficiency, while factoring in the schedule plan to ensure that the transmission channel is shared in a fair manner. Users can be prioritized based on many factors. For example, priority can be based on relative channel gains, relative signal-to-interference levels (relative to the average conditions under which the schedule plan calculations were made), absolute channel gains, absolute signal-to-interference levels or some combination of these quantities.

[0021] In the actual schedule phase, the transmit power levels are adjusted based on current conditions at both the BTS (In the current example BTS 104_a) transmitter and all the MSs 108_a, 110_a, 112_a receivers communicating with the BTS 104_a. A first embodiment of the actual schedule (FIG. 4) is a credit-based implementation of weighted-fair-queueing. The implementation is credit-based because it allocates the available bandwidth capacity to users based on credits. The algorithm uses quantities \bar{W}_k , C_j , w_j , $\hat{R}_{j,avg}$ and \hat{R} defined for each connection and numbers β ($\beta \geq 0$) and γ ($0 \leq \gamma \leq 1$). The quantities w_j , $\hat{R}_{j,avg}$ and \hat{R} are the weight for the connection class (determined by QoS class), average effective data rate (calculated by the schedule plan) and current effective data rate (calculated using current channel conditions), respectively. The quantity C_j is the number of channel and class based credits for each connection and is defined by the equation:

$$C_j = w_j \hat{R}_{j,avg}^{\beta} \left(\frac{\hat{R}_j}{\hat{R}_{j,avg}} \right)^{\gamma}. \quad (6)$$

The quantity \bar{W}_j is the amount of normalized bytes transmitted for each connection during the scheduling window, and for each connection, \bar{W}_j is reset to zero at the beginning of each window. Numbers β and γ are tunable control parameters used in equation (6) to determine the actual allocation of the available bandwidth capacity. The choice for the value of β depends on the utility function chosen. β is used to enforce to what extent efficiency, i.e., total throughput, is sacrificed in favor of fairness. Control parameter γ is used to determine how much emphasis should be placed on the current value of the effective data rate when computing the credits of the users. For example, if γ is set to zero, only the average value of the effective data rate is used in computing the credit. The value of γ should depend on how accurate or reliable the current effective data rates are. The purpose of γ is to take advantage of the fast measurement reports if available and improve the total throughput by serving the users with better current radio conditions first. The actual schedule algorithm gives a MS connection a throughput that is proportional to its credit subject to various constraints and bottlenecks. The algorithm also prioritizes users based on their current effective data rate relative to their average effective data rates. Every time a packet is removed from a user queue, \bar{W} is updated using the equation:

$$\bar{W}_j = \bar{W}_j + \left(\frac{\text{number of bytes received}_j}{C_j} \right) \quad (7)$$

The algorithm attempts to keep \bar{W}_j roughly equal for all users by selecting MS 108_a, 110_a, 112_a with the lowest \bar{W}_j for transmission in each frame provided they are allowed to transmit and have data to transmit. New users are assigned a \bar{W}_j value based on the \bar{W}_j values of the already present users, their QoS class, and amount of data to be transferred. [0022] FIG. 4 is a flow chart of the first embodiment of the actual schedule algorithm described above. In block 402, the actual effective data rate \hat{R}_j is set equal to the average effective data rate $\hat{R}_{j,avg}$ calculated in the schedule plan. In addition, the credit value C_j is calculated (using equation (6)) and the amount of normalized bytes transmitted for each connection \bar{W}_j is set to zero. In block 404, P^{nom} output in block 214 of FIG. 2 is used along with current values of gain and interference terms in a known power control algorithm to determine actual power values for each MS 108_a, 110_a, 112_a in each cell. Next, in decision block 406, the algorithm determines whether a measurement report was received. If a measurement report was received, current values of actual power, gain and interference terms are used in a data rate/link adaptation algorithm to determine the MCS and/or SF and \hat{R}_j for each MS 108_a, 110_a, 112_a in each cell (block 408). Next, in block 410, the current credit value C_j is computed using \hat{R}_j , $\hat{R}_{j,avg}$ and the knowledge of the QoS of each MS 108_a, 110_a, 112_a in each cell. In block 412, on a per cell basis, amongst the users who have data to transmit and are allowed by system constraints to transmit, the user with the lowest \bar{W}_j is determined and assigned for transmission. If a measurement report was not received in decision block 406, the algorithm skips blocks 408 and 410 and proceeds with block 412. Next, in block 414, \bar{W}_j is updated for each MS 108_a, 110_a, 112_a in each cell using equation (7). In decision block 416, the algorithm determines if it has reached the end of the scheduling plan window. If the end has not been reached, the algorithm loops back through the process beginning with block 404. If the end has been reached, the algorithm proceeds to the schedule plan phase beginning with block 202.

[0023] An alternate embodiment of the actual plan, shown in the flow chart of FIG. 5, is a distributed and asynchronous implementation of the algorithm. The power allocation part of the schedule plan is used whenever there is power reallocation message generated by the RNC 102. The asynchronous implementation implicitly uses the decision window concept by computing the \bar{W} and $\hat{R}_{j,avg}$ based on exponential averaging:

$$\bar{R}_{j,avg}^{new} = (1 - \tau) \cdot \hat{R}_{j,avg}^{old} + \tau \cdot \hat{R}_j \quad (8)$$

where τ is an appropriate discount factor. At the beginning of each frame, the algorithm updates \bar{W} according to:

$$\bar{W} = (1 - \phi) \cdot \bar{W} \quad (9)$$

where $0 < \phi \leq 1$ and $1 - \phi$ is a discount factor used as commonly in the art to keep \bar{W} from continuously increasing with time. After serving a user in each time slot, the algorithm updates \bar{W}_j of the user that was just served as follows:

$$\bar{W}_j = \bar{W}_j + \phi \cdot \frac{\text{number of bytes transmitted}_j}{C_j} \quad (10)$$

where ϕ is an additional normalizing factor that scales the numerical value of \bar{W}_j appropriately. As per the previous embodiment

$$C_j = w_j \hat{R}_{j,avg}^{\beta} \left(\frac{\hat{R}_j}{\hat{R}_{j,avg}} \right)^{\gamma},$$

and the actual schedule chooses the MS 108_a 110_a 112_a with the smallest \bar{W}_j for transmission in each frame provided they are allowed to transmit and have data to transmit.

[0024] FIG. 5 is a flow chart of the alternate embodiment of the actual schedule algorithm described above. In block 502, P_{nom} output in block 214 of FIG. 2 is used along with current values of gain and interference terms in a known power control algorithm to determine actual power values for each MS 108_a 110_a 112_a in each cell. Next, in decision block 504, the algorithm determines whether or not a measurement report was received. If a measurement report was received, current values of actual power, gain and interference terms are used in a data rate/link adaptation algorithm to determine the MCS and/or SF and \hat{R}_j for each MS 108_a 110_a 112_a in each cell (block 506). Next, in block 508, $\hat{R}_{j,avg}$ is updated for each MS 108_a 110_a 112_a in each cell using equation (8). In block 510, the current credit value C_j is computed using \hat{R}_j , $\hat{R}_{j,avg}$ and the knowledge of the QoS of each MS 108_a 110_a 112_a in each cell. In block 512, on a per cell basis amongst the users who have data to transmit and are allowed by system constraints to transmit, the user with the lowest \bar{W}_j is determined and assigned for transmission. If a measurement report was not received in decision block 504, the algorithm skips blocks 506, 508 and 510 and proceeds with block 512. Next, in block 514, \bar{W}_j is updated for each MS 108_a 110_a 112_a in each cell using equations (9) and (10). In decision block 516, the algorithm determines whether or not a power reallocation message was received. If a power reallocation message is received, the schedule plan algorithm is repeated to recalculate P_{nom} (FIG. 2, block 202). If a power reallocation message is not received, the algorithm loops back through the process beginning with block 502.

[0025] In a second alternate embodiment, the packet scheduler uses the relative effective rate compared to the average rate calculated in the schedule plan phase to prioritize the mobiles 108, 110, 112. The mobiles 108, 110, 112 are allowed to transmit according to their priorities (which can change as frequently as the current channel information is available) subject to their having bit credits and non-zero queue lengths (i.e., frames stored in their respective queue). In this embodiment, the credits are defined as $C_j = w_j \hat{R}_{j,avg}^{\beta}$ and the user with the smallest

$$\bar{W}_j \left(\frac{\hat{R}_{j,avg}}{\hat{R}_j} \right)^{\gamma}$$

is chosen for transmission in each frame provided that the user is allowed to transmit and has data to transmit. The update of \bar{W}_j is performed using either equation (7) or equations (9) and (10). In the latter case, $\hat{R}_{j,avg}$ is computed using equation (8). In other (no less preferred) embodiments, any of the other parameters or a combination of the parameters can be used to determine the transmission priorities.

[0026] The schemes described above are for a TDMA system. For a CDMA system, the sorted list (increasing order) of \bar{W}_j s provides the order in which users are to be chosen for transmission during the current frame. The exact list of users who transmit during the current frame would be determined according to the following steps:

1. For the first user, if there is no data, skip to step 3. If there is data to transmit, then label the user as the current user and proceed with step 2.
2. For the current user, transmit the maximum amount of data that the system resources (power budget remaining, code resources remaining, etc.) allow. Proceed to next step.
3. If all users in the cell are exhausted, then exit. Determine whether the next user on the ordered list has data to transmit. If so, label the user as the current user and go to step 2. If the next user on the ordered list does not have data to transmit, repeat this step 3.

[0027] Those skilled in the art will recognize that various modifications and variations can be made in the apparatus of the present invention and in construction of this apparatus without departing from the scope or spirit of this invention. For example, the method of the present invention can be implemented in a communications system that includes more than two base stations.

Claims

1. In a communications system comprising a plurality of cells, each cell having a base station (104) and a plurality of mobile stations (108, 110, 112), a method of scheduling packet transmission **characterized by**:

a) determining a nominal power level for all base stations in the system (210);
 b) determining an average effective data rate for all mobile stations in the system (206);
 c) using the transmit power level and average effective data rate to determine a tentative transmission schedule for each of the plurality of mobile stations in the system (214); and
 d) modifying the tentative transmission schedule using current radio conditions in a particular cell to determine an actual transmission schedule for each mobile station in the particular cell (402-414; 502-514).

2. The method of claim 1 wherein step a) is **characterized by** the steps of initializing the transmit power level to a predetermine value and using the predetermined value to determine the nominal power level for all base stations (104) in the system.

3. The method of claim 1 wherein step b) is **characterized by** the steps of:

i) approximating a signal to interference plus noise ratio (SINR) for each of the plurality of mobile stations (108, 110, 112) in the system (204);
 ii) using the SINR to determine a modulation and coding scheme and/or spreading factor and effective data rate for each of the plurality of mobile stations in the system (206); and
 iii) using the effective data rate to determine the average effective data rate for all mobile stations in the system (206).

4. The method of claim 3 wherein the step of approximating the SINR is **characterized by** using the nominal power level, current gain, current interference channel gain and receiver noise power plus unaccounted interference terms, wherein the current gain, current interference channel gain and receiver noise power plus unaccounted interference terms are obtained by polling transceivers at each of the plurality of mobile stations (108, 110, 112) and the base station (104) for a measurement report.

5. The method of claim 3 wherein step iii) is further **characterized by** using the average effective data rate to determine a planned fraction of frames to be used each of the plurality of mobile stations (104) in the system (208).

6. The method of claim 1 wherein step c) is **characterized by** the steps of updating the nominal power level and determining whether convergence has been achieved; wherein if convergence has not been achieved, repeating steps b) - d) (212).

7. The method of claim 1 wherein step d) is **characterized by**:

i) determining an actual power value for each of the plurality of mobile stations (104) in the cell (404);
 ii) determining an actual effective data rate for each of the plurality of mobile stations in the cell (408);
 iii) determining a current credit value for each of the plurality of mobile stations in the cell (410);
 iv) determining which mobile station of the plurality of mobile stations has a lowest amount of normalized bytes to transmit (412); and
 v) scheduling the mobile station with the lowest amount of normalized bytes for transmission.

8. The method of claim 7 wherein step i) is **characterized by** using the nominal power level and current values of gain and interference terms in a power control algorithm to determine the actual power value (404; 502).

9. The method of claim 1 wherein step d) is **characterized by**:

i) determining an actual power value for each of the plurality of mobile stations (104) in the cell (502);
 ii) determining an actual effective data rate for each of the plurality of mobile stations in the cell (506);
 iii) updating the average effective data rate for each mobile station of the plurality of mobile stations in the cell (508);
 iv) determining a current credit value for each of the plurality of mobile stations in the cell (510);
 v) determining which mobile station of the plurality of mobile stations has a lowest amount of normalized bytes

to transmit (512); and
vi) scheduling the mobile station with the lowest amount of normalized bytes for transmission.

- 5 10. The method of claim 9 wherein step iv) is **characterized by** using the actual effective data rate, the average effective data rate and a quality of service of each mobile station (104) of the plurality of mobile stations in the cell to compute the current credit value of each of the plurality of mobile stations (510).

10

15

20

25

30

35

40

45

50

55






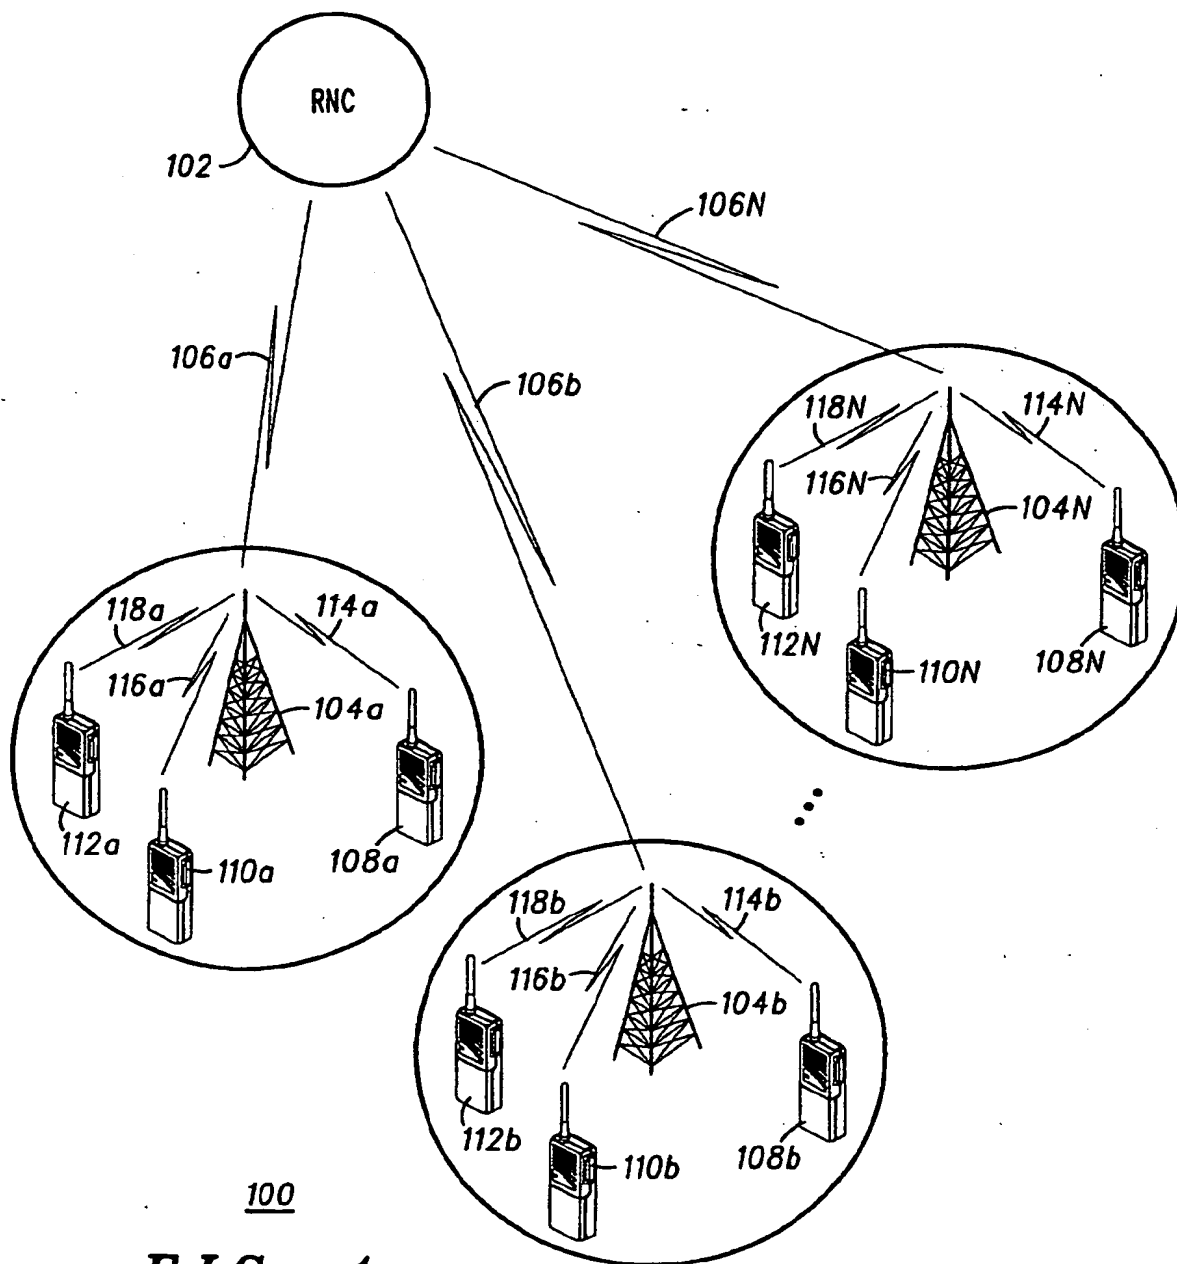


FIG. 1

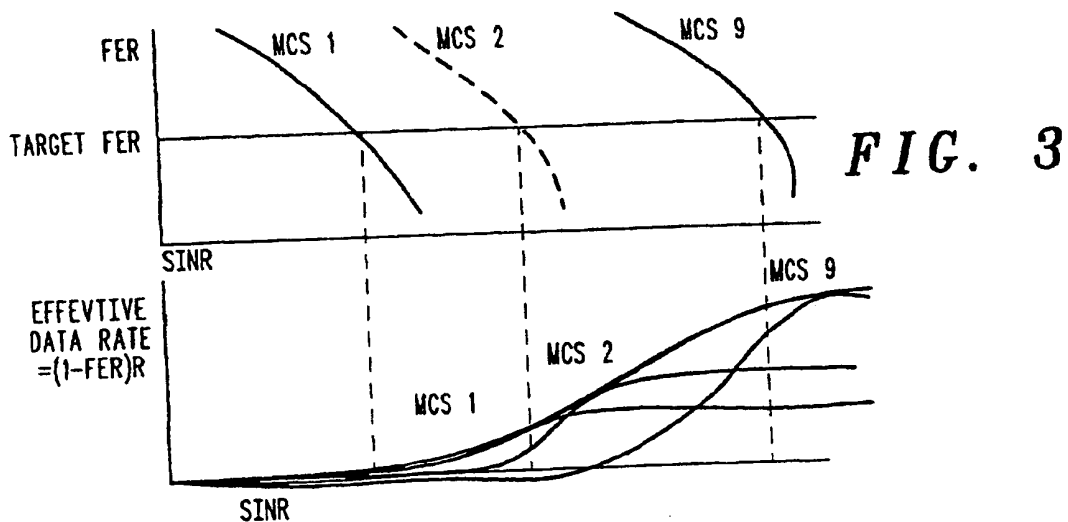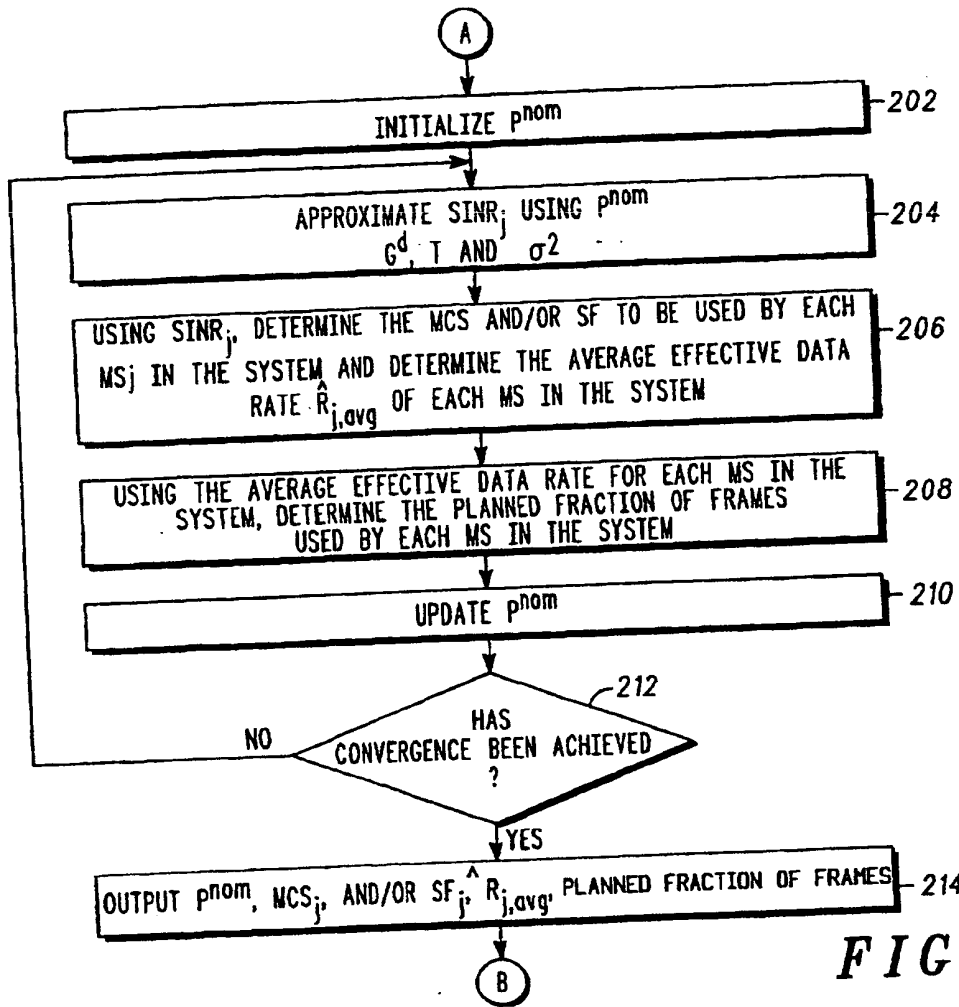

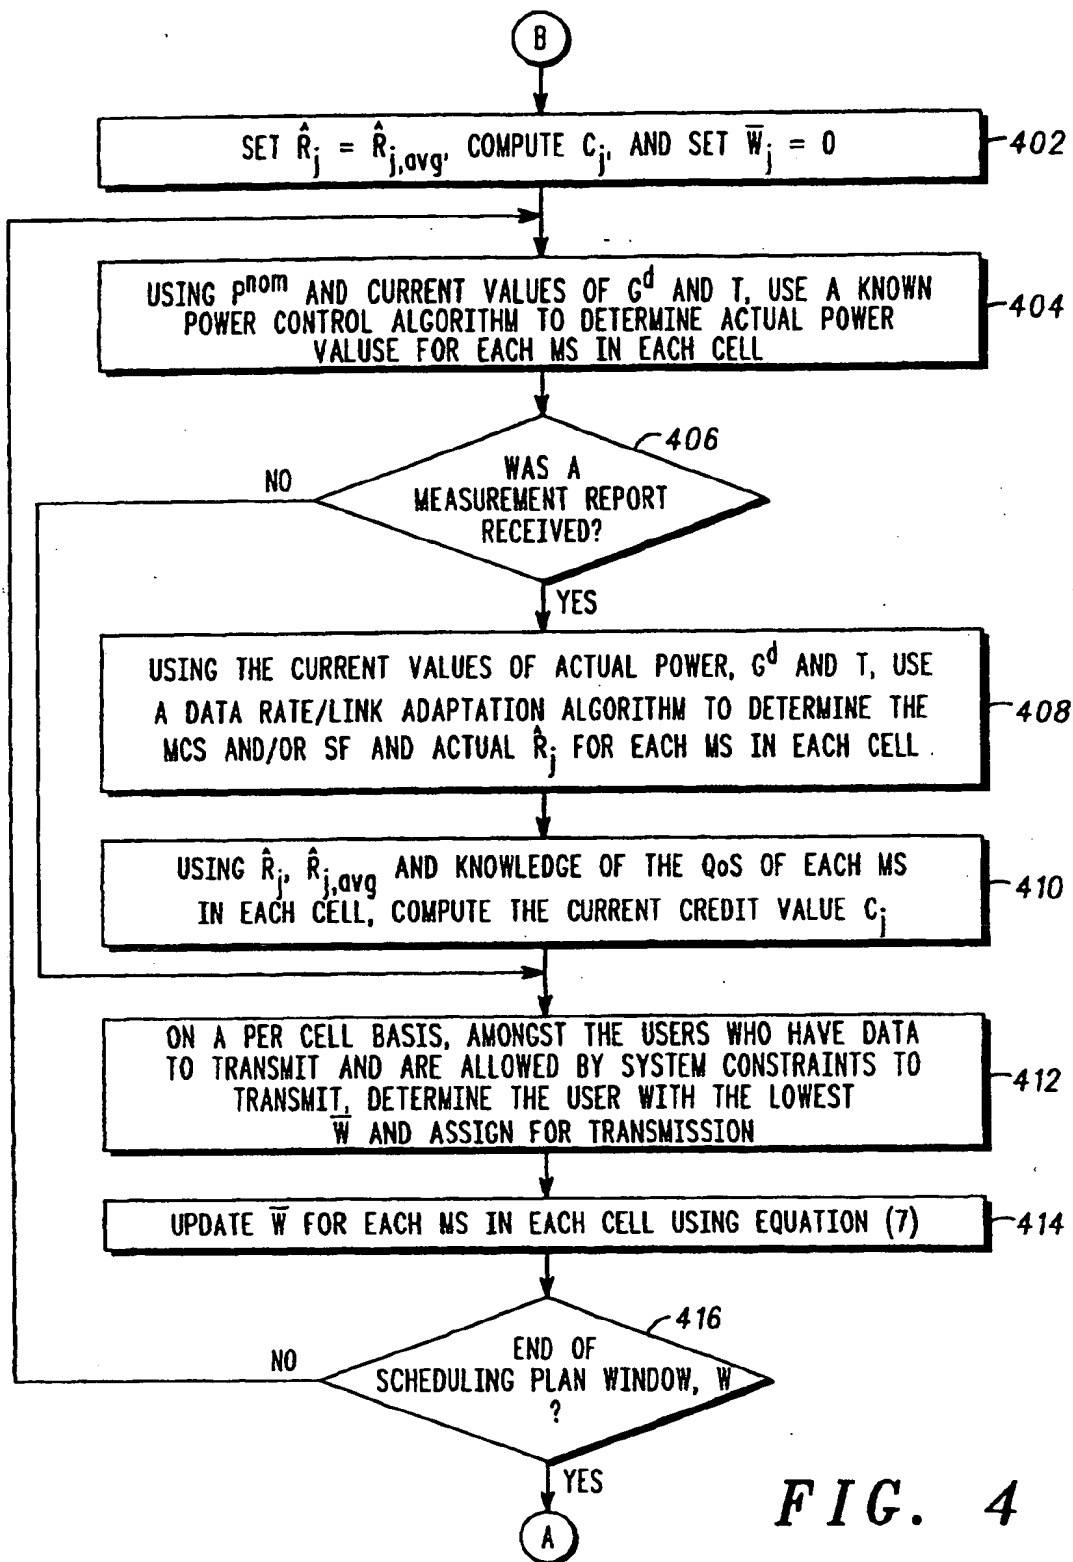

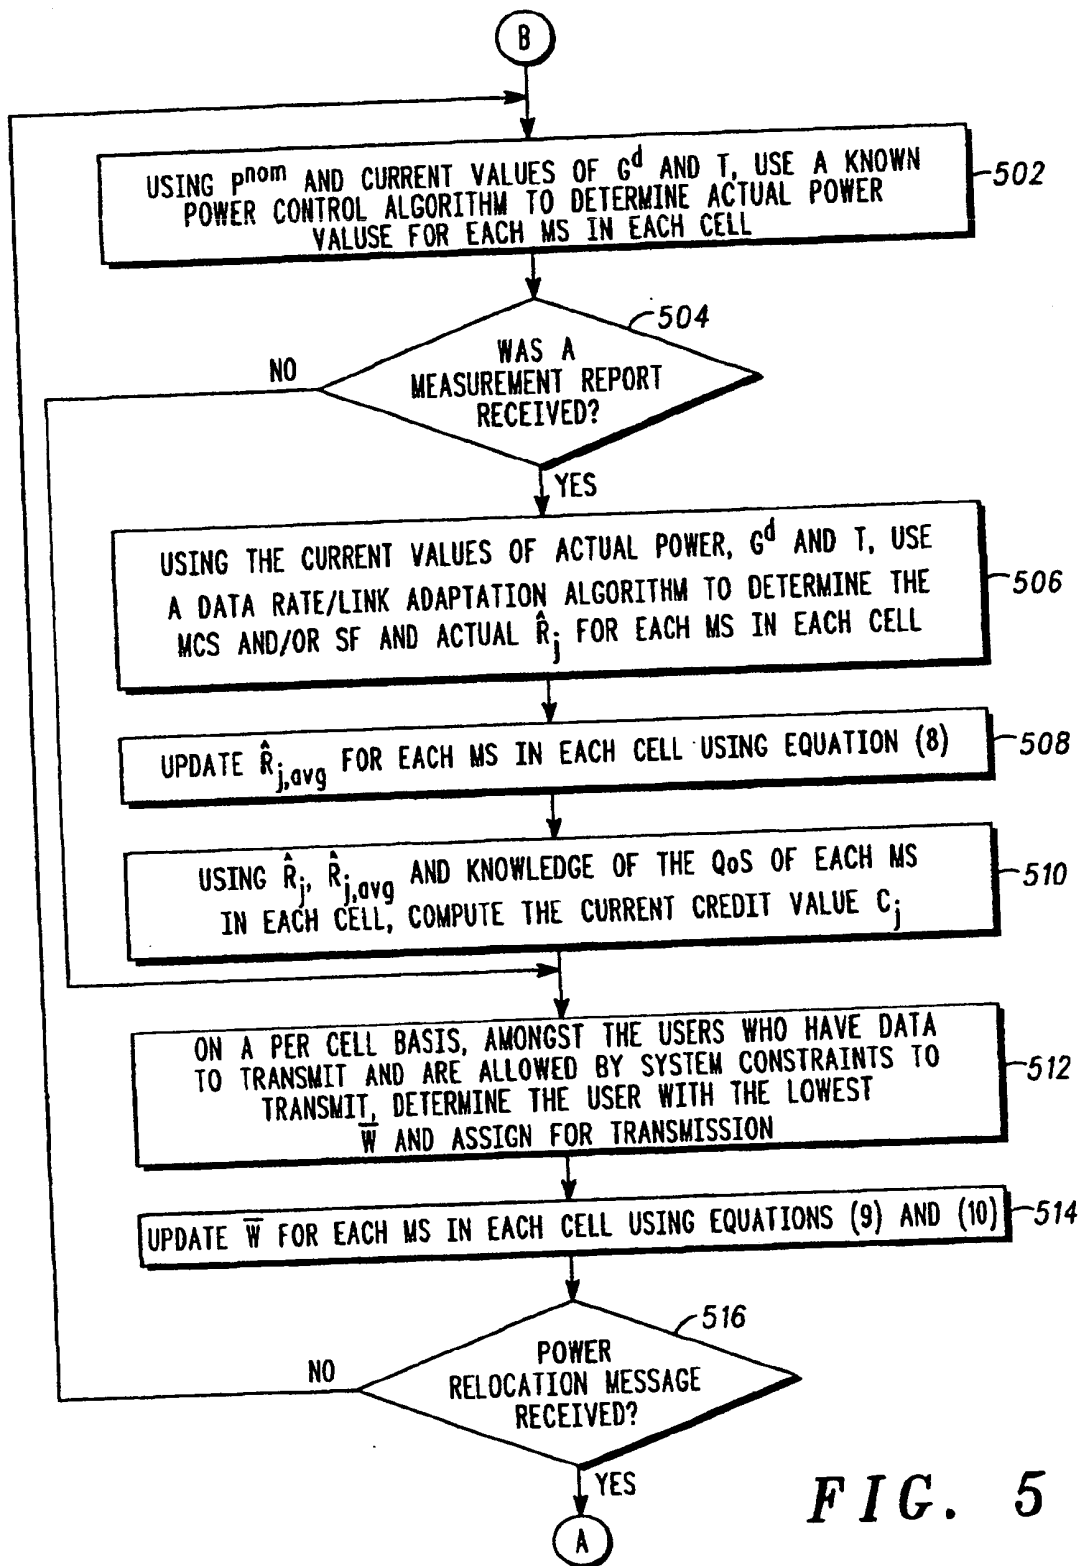



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 227 626 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
17.09.2003 Bulletin 2003/38

(51) Int Cl.7: H04L 12/56, H04L 29/06

(43) Date of publication A2:
31.07.2002 Bulletin 2002/31

(21) Application number: 02000449.5

(22) Date of filing: 08.01.2002

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

- Agarwal, Rajeev
Northbrook, Illinois 60062 (US)
- La, Richard J.
Buffalo Grove, Illinois 60089 (US)

(30) Priority: 12.01.2001 US 759846

(71) Applicant: MOTOROLA, INC.
Schaumburg, IL 60196 (US)

(74) Representative: Potts, Susan Patricia et al
Motorola European Intellectual Property
Operations
Midpoint
Alencon Link
Basingstoke, Hampshire RG21 7PL (GB)

(72) Inventors:
• Subramanian, Vijay G.
Chicago, Illinois 60057 (US)

(54) **Method for packet scheduling and radio resource allocation in a wireless communication system**

(57) A method of performing packet level transmission scheduling in a communications system including a plurality of cells, each cell including a base station (104) and a plurality of mobile stations (108, 110, 112). The method performs scheduling while considering radio resource allocation at the wireless access node. In a schedule plan phase of the method, average power and average effective data rate are determined for all mobile stations in the system. In addition, the planned fraction of frames p that each mobile in the system will transmit is determined so that resources are allocated fairly. In the actual schedule phase of the method, current power and effective data rate values are compared to the average power values. This information along with the p values is used to determine the actual schedule of packet transmissions for all mobiles in a particular cell.

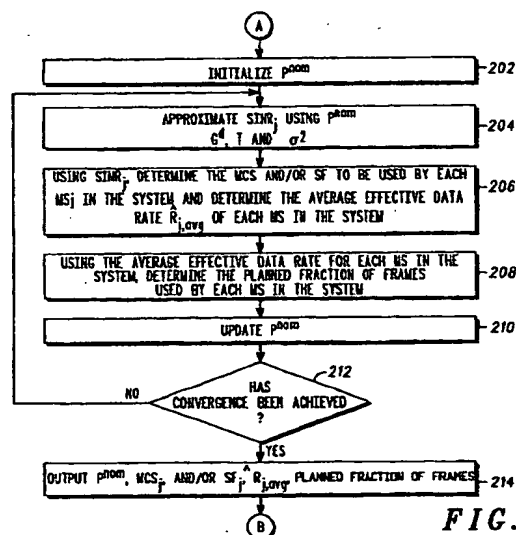


FIG. 2

EP 1 227 626 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 00 0449

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	LU Y ET AL: "Unified power control, error correction coding and scheduling for a CDMA downlink system" WIRELESS NETWORKS, ACM, US, vol. 3, no. 1, 1 March 1997 (1997-03-01), pages 83-90, XP000688203 ISSN: 1022-0038 * the whole document *	1-6	H04L12/56 H04L29/06
Y	---	7,9	
Y	GARG R ET AL: "Fair bandwidth sharing among virtual networks: a capacity resizing approach" INFOCOM 2000. NINETEENTH ANNUAL JOINT CONFERENCE OF THE IEEE COMPUTER AND COMMUNICATIONS SOCIETIES. PROCEEDINGS. IEEE TEL AVIV, ISRAEL 26-30 MARCH 2000, PISCATAWAY, NJ, USA, IEEE, US, 26 March 2000 (2000-03-26), pages 255-264, XP010376027 ISBN: 0-7803-5880-5 * page 257, right-hand column, paragraph 5 - paragraph 7 *	7,9	
A	US 5 923 650 A (LIN YU-CHUAN ET AL) 13 July 1999 (1999-07-13) * figures 7-9 * * column 9, line 43 - column 21, line 50 *	1-10	
A	WO 00 14900 A (QUALCOMM INC) 16 March 2000 (2000-03-16) * page 10, line 14 - page 19, line 30 * * figure 6 *	1-10	
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 29 July 2003	Examiner Eraso Helguera, J
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 02 82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 00 0449

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	<p>LU S ET AL: "FAIR SCHEDULING IN WIRELESS PACKET NETWORKS"</p> <p>IEEE / ACM TRANSACTIONS ON NETWORKING, IEEE INC. NEW YORK, US, vol. 7, no. 4, August 1999 (1999-08), pages 473-489, XP000848693</p> <p>ISSN: 1063-6692</p> <p>* the whole document *</p>	1-10	
A	<p>ECKHARDT D A ET AL: "Effort-limited fair (ELF) scheduling for wireless networks"</p> <p>PROCEEDINGS IEEE INFOCOM 2000. CONFERENCE ON COMPUTER COMMUNICATIONS. NINETEENTH ANNUAL JOINT CONFERENCE OF THE IEEE COMPUTER AND COMMUNICATIONS SOCIETIES (CAT. NO.00CH37064), PROCEEDINGS IEEE INFOCOM 2000. CONFERENCE ON COMPUTER COMMUNICATIONS. NINE, pages 1097-1106 vol.3, XP010376045</p> <p>2000, Piscataway, NJ, USA, IEEE, USA</p> <p>ISBN: 0-7803-5880-5</p> <p>* the whole document *</p>	1-10	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 29 July 2003	Examiner Eraso Helguera, J
CATEGORY OF CITED DOCUMENTS		<p>T : theory or principle underlying the invention</p> <p>E : earlier patent document, but published on, or after the filing date</p> <p>D : document cited in the application</p> <p>L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>	
<p>X : particularly relevant if taken alone</p> <p>Y : particularly relevant if combined with another document of the same category</p> <p>A : technological background</p> <p>C : non-written disclosure</p> <p>P : intermediate document</p>			

EPO FORM 1503 03.82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 00 0449

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	<p>BHAGWAT P ET AL: "Enhancing throughput over wireless LANs using channel state dependent packet scheduling"</p> <p>PROCEEDINGS IEEE INFOCOM '96. THE CONFERENCE ON COMPUTER COMMUNICATIONS. FIFTEENTH ANNUAL JOINT CONFERENCE OF THE IEEE COMPUTER SOCIETIES. NETWORKING THE NEXT GENERATION (CAT. NO.96CB35887), PROCEEDINGS OF IEEE INFOCOM '96. CONFERENCE ON COMPUTER COM,</p> <p>pages 1133-1140 vol.3, XP010158183</p> <p>1996, Los Alamitos, CA, USA, IEEE Comput. Soc. Press, USA</p> <p>ISBN: 0-8186-7293-5</p> <p>* page 1136, right-hand column, paragraph 4</p> <p>- page 1140, left-hand column, paragraph 1 *</p> <p>-----</p>	1-10	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
BERLIN		29 July 2003	Eraso Helguera, J
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone</p> <p>Y : particularly relevant if combined with another document of the same category</p> <p>A : technological background</p> <p>O : non-written disclosure</p> <p>P : intermediate document</p> <p>T : theory or principle underlying the invention</p> <p>E : earlier patent document, but published on, or after the filing date</p> <p>D : document cited in the application</p> <p>L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/02 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 02 00 0449

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-07-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5923650	A	13-07-1999	US 5914950 A	22-06-1999
			AU 9201398 A	08-03-1999
			CN 1301470 T	27-06-2001
			EP 1005775 A1	07-06-2000
			JP 2001516975 T	02-10-2001
			WO 9909779 A1	25-02-1999
			ZA 9807506 A	30-06-1999
			AU 7246698 A	30-10-1998
			CN 1263675 T	16-08-2000
			EP 0974237 A2	26-01-2000
			JP 2001519123 T	16-10-2001
			TW 391099 B	21-05-2000
			WO 9845966 A2	15-10-1998
			ZA 9802973 A	13-10-1998
WO 0014900	A	16-03-2000	US 6597705 B1	22-07-2003
			AU 6036799 A	27-03-2000
			CN 1326622 T	12-12-2001
			EP 1112624 A1	04-07-2001
			JP 2002524962 T	06-08-2002
			WO 0014900 A1	16-03-2000

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)